


ALH-II Series Professional Lever Hoist

The ABS ALH-II series Lever Hoists feature an innovative brake disc condition indicator giving an external indication of the amount of wear on the brake disc. Manufactured to high precision and quality, the ALH-II series lever hoists are perfect for the toughest environments. Fitted with European Load Chains and supplied in accordance with European Regulations and the Machinery Directive.



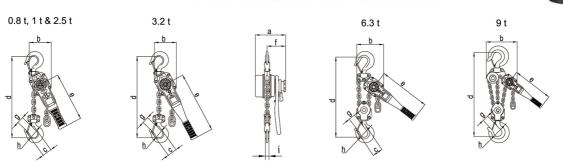

Rotating Handwheel Anti Clock-wisely

Specific	ation	IS							
Capacity		(tonnes)	8.0	1	1.6	2.5	3.2	6.3	9
No. of Falls			1	1	1	1	1	2	3
Load Chain (mm)		5.6 x 15.7	5.6 x 15.7	7.1 x 19.9	8.8 x 24.6	10 x 28	10 x 28	10 x 28	
Pull to Rated Load (N)		350	350	440	470	450	460	500	
Proof Load (tonnes)		(tonnes)	1.2	1.5	2.4	3.8	4.8	9.5	13.5
Standard Lift (m)		(m)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Net Weight (kg)		(kg)	5.7	5.9	8.0	11.2	13.6	26.0	40.0
Extra Wt. per m		(kg)	0.7	0.7	1.1	1.7	2.3	4.7	7
Dimensions	а	(mm)	146	146	164	179	196	196	196
	b	(mm)	119	119	126	150	159	218	298
	С	(mm)	41.5	49.4	52	58.6	61.9	84.3	-
	d	(mm)	280	300	335	375	395	540	680
	е	(mm)	245	245	265	265	415	415	415
	f	(mm)	96	96	100	103	114	114	114
	g	(mm)	26.5	31.5	35.5	41	43	53	64
	h	(mm)	35.5	42.5	42.5	47	50	60	85
	i	(mm)	14	15	19	21	24.5	34	40